# Connection parts with nominal width DN 6 Valves, coupling valves, protection caps, fittings, adapters and connections for analytic instruments

WIKA data sheet SP 61.12

### **Applications**

- Handing at SF<sub>6</sub> gas tanks
- For indoor and outdoor equipment

#### **Special features**

- The valves can be disconnected or coupled under pressure or vacuum
- Vacuum and pressure-tight (-1 ... +64 bar)
- Working temperature -40 ... +80 °C
- Leak rate: GCV, GCA,

measuring chambers:  $\leq 1 \cdot 10^{-8} \text{ mbar} \cdot \text{I/s}$ GCG:  $\leq 1 \cdot 10^{-5} \text{ mbar} \cdot \text{I/s}$ 

■ Tested helium tightness of 100 %



#### Connection parts with nominal width DN 6

#### Description

#### Safe and simple operation

WIKA's connection parts enables the secure storage and handling of environmentally hazardous  $SF_6$  greenhouse gas in the equipment provided for this. The connecting parts have been precisely and specifically optimised for this application.

The ease of mounting and removal, as well as being 100 % tested for leak tightness, make these connecting parts safe and reliable interfaces for the filling and maintenance of the equipment.

#### **Highest quality**

In order to meet the high demands for quality, the robust design has passed extensive testing with actuation tests, tests in atmospheric conditions and shock tests. The connecting parts are manufactured from high-quality aluminium, brass and stainless steel. On request, the connecting parts can be supplied with a material certificate.

#### Comprehensive product range

The product range for connection parts with nominal width DN 6 consists of self-closing valves, matching couplings and soldered and weld-in connections. For the connection of DN 6 to other nominal widths and connections, the appropriate adapters and components are available. A protection cap offers mechanical protection and additional sealing.

By using WIKA connection parts, the maintenance-free and reliable separation of  $SF_6$  gas compartments from the environment is made possible. In this way, not only is the escape of  $SF_6$  gas prevented, but also the ingress of moisture.




# Valve, model GCV-06

#### Attachment parts, left (M24 x 1.5)












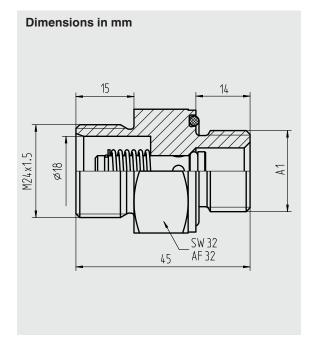

Connection for analytic instruments, model GCG-06 see page 4	

Thread A1	Material	Order no.
M20 x 1,5	Aluminium	13422502
G 1/2 B	Aluminium	13376498
G ½ B	Stainless steel	13360281

The O-ring is included. Spare part: O-ring D23 Order no.: 14023883



# Coupling valve, model GCC-06

# Attachment parts, left (M24 x 1.5)








# Attachment parts, right (M24 x 1.5)



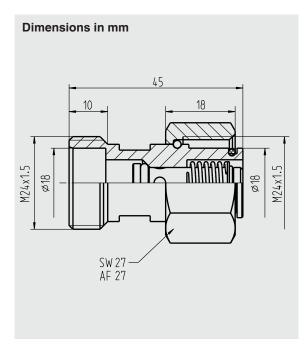

Material	Order no.
Aluminium	13376528

The O-ring is included. Spare part: O-ring D14 Order no.: 14007857

# Connection for analytic instruments, model GCG-06


Attachment parts, left

Attachment parts, right (M24 x 1.5)







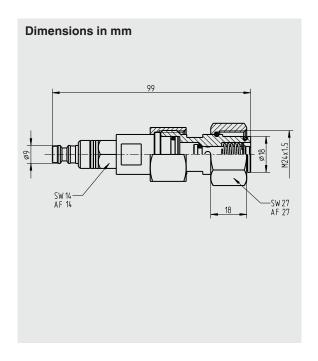

Material	Order no.
Aluminium, brass, stainless steel	14091750

The O-ring is included. Spare part: O-ring D14 Order no.: 14007857


# Adapter, model GCA-06

Nominal width adapter DN 6 to DN 8



Measuring instrument adapter DN 6 to G  $^{1\!\!/}_4$ 



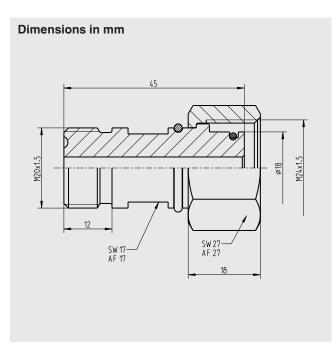

Dimensions in mm
W IKA Dichtung W IKA seoting  Sw 27  AF 27  18


Material	Order no.
Brass stainless steel	14091765

Material	Order no.
Aluminium	13370643


The O-ring is included. Spare part: O-ring D14 Order no.: 14007857 The O-ring is included. Spare part: O-ring D14 Order no.: 14007857

## Fitting, model GCF-06

## Protection cap, model GCP-06





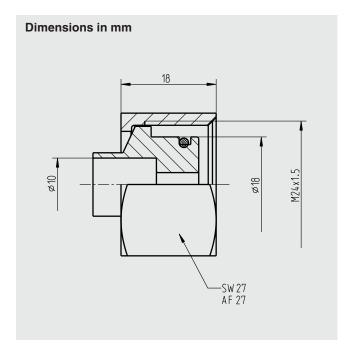

Dimensions in mm
SW 27 AF 27

Material	Order no.
Stainless steel	13428781

Material	Order no.
Aluminium	13376528

The O-ring is included.

Spare part: O-ring D14

Order no.: 14007857

The O-ring is included. Spare part: O-ring D14 Order no.: 14007857

**Ordering information** 

Specification of the model is sufficient for ordering.

© 04/2014 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.

The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

WIKA data sheet SP 61.12 · 08/2019



Page 6 of 6

www.wika.de